

10-23-00

PATENT

JC921 U.S. Pat.
09/692926
10/20/00

Attorney's Docket No. 00-5019

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Box Patent Application
Assistant Commissioner for Patents
Washington, D. C. 20231

NEW APPLICATION TRANSMITTAL

Transmitted herewith for filing is the patent application of:

Inventor(s): Douglas J. Cowell
Ravi Narayan

For: METHOD AND SYSTEM FOR CALL CENTER SCREENING

Certification Under 37 CFR 1.10

I hereby certify that this New Application Transmittal and the documents referred to as enclosed therein are being deposited with the United States Postal Service on this date 10/20/00 in an envelope as "Express Mail Post Office to Addressee" mailing label EK673491956US addressed to the: Assistant Commissioner for Patents, Washington, D.C. 20231.

Mary E. Anza
(typed or printed name of person mailing paper)
Mary E. Anza
(Signature of person mailing paper)


Attorney's Docket No. 00-5019

Enclosed are:

[15] pages of specification and cover sheet
 [12] pages of claims
 [1] page of abstract
 [3] sheets of formal drawings
 [2] pages of declaration and power of attorney.
 [] pages of assignment and assignment recordation form
 [] pages of information disclosure statement
 [] pages of form 1449
 [] references
 [1] return postcard

CLAIMS AS FILED				
	NUMBER FILED	NUMBER EXTRA	RATE	BASIC FEE \$710.00
TOTAL CLAIMS	46 - 20	26 x	\$18.00	468.00
INDEPENDENT CLAIMS	3 - 3	0 x	\$80.00	.00
MULTIPLE DEPENDENT CLAIMS(S)		0 x	\$270.00	0.00
TOTAL FILING FEE				\$1178.00

- [x] Please charge my Deposit Account No. 07-2339 in the amount of **\$1178.00**. **This transmittal letter is submitted in duplicate.**
- [x] The Commissioner is hereby authorized to charge any additional fees under 37 CFR 1.16 and 1.17 which may be required by the papers submitted herewith or credit any overpayment to Account No. 07-2339.
This transmittal letter is submitted in duplicate.


James K. Weixel
Registration No. 44,399
Attorney for Applicant

Verizon Services Group
600 Hidden Ridge, HQE03G13
Irving, TX 75038
Phone: (781) 466-2220
Fax: (781) 466-4021

Parameter	Mean	SD	Min	Max
Age (years)	24.5	2.5	18	30
Gender				
Male	15	0	0	15
Female	10	0	0	10
Height (cm)	175.5	5.5	165	185
Weight (kg)	70.5	10.5	55	90
Heart rate (b/min)	165	15	140	185
Stroke volume (L)	1.2	0.2	0.8	1.6
Cardiac output (L/min)	20.0	3.0	14.0	26.0
Systemic blood pressure (mmHg)	120/80	10/10	100/60	140/100
Mean arterial pressure (mmHg)	93	10	70	110
Heart rate variability (ms)	50	10	30	70
Stroke volume index (L/m ²)	0.06	0.01	0.04	0.08
Cardiac output index (L/min/m ²)	1.2	0.2	0.8	1.6
Systemic blood pressure index (mmHg/m ²)	120/80	10/10	100/60	140/100
Mean arterial pressure index (mmHg/m ²)	93	10	70	110
Heart rate variability index (ms/m ²)	50	10	30	70
Stroke volume index (L/m ²)	0.06	0.01	0.04	0.08
Cardiac output index (L/min/m ²)	1.2	0.2	0.8	1.6
Systemic blood pressure index (mmHg/m ²)	120/80	10/10	100/60	140/100
Mean arterial pressure index (mmHg/m ²)	93	10	70	110
Heart rate variability index (ms/m ²)	50	10	30	70

UNITED STATES PATENT APPLICATION

Douglas J. COWELL

Ravi NARAYAN

METHOD AND SYSTEM FOR CALL CENTER SCREENING

TITLE OF THE INVENTION

METHOD AND SYSTEM FOR CALL CENTER SCREENING

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to telecommunication networks and, more particularly, to a method and system for intercepting calls for selected network services and routing the calls to predetermined call centers.

Background of the Art

In present network service environments, customers may order Asynchronous Digital Subscriber Line (ADSL) and Integrated Services Digital Network (ISDN) service simply by calling designated telephone numbers associated with a service provider, and requesting the desired service. Generally, separate telephone numbers were designated for specific types of customers requesting ADSL service. Residential ADSL service was associated with one telephone number, while business ADSL service was associated with another number.

As the popularity and demand for ADSL service increased, the business number associated with ADSL service became widely distributed. Eventually, customers requesting residential ADSL service were calling the business ADSL numbers more frequently than the residential ADSL telephone number. As a result, the Business Service Centers (BSCs) handling these service requests were receiving excess traffic, which affected the processing speed of the requests. At the same time while the BSCs were overloaded, residential sales centers associated with handling residential ADSL service calls were being underutilized.

Although conventional techniques for handling service requests enable customers to differentiate between the types of service they would like to receive, the methods in which the service requests are handled have drastic affects on the systems implementing these methods.

The mis-management of service requests affect not only the traffic load of specific areas of the provider's network, but have business repercussions as well. Delays in service request processing have a tendency to frustrate potential customers because of the extended time taken to process service requests routed to overloaded service centers. Frustrated customers have

5 tendencies to look for services elsewhere when the process for obtaining an available service from a provider is deemed tedious or lengthy.

SUMMARY OF THE INVENTION

10 It is therefore desirable to have a method and system that will alleviate excess traffic to selected sales centers at the same time reducing the processing time customers have to wait for service request responses.

Methods, systems and articles of manufacture consistent with the present invention utilize different telephone numbers for ordering different services. A first telephone number is

15 associated only with one available service and is advertised to the public in a specific forum, while a second telephone number is associated with the one available service, as well as another service. The telephone number associated with both services is advertised in a general forum. An Advanced Intelligent Network (AIN) service intercepts the service request calls associated with both telephone numbers and routes residential and business customers to specific call

20 centers.

In accordance with an embodiment of the invention, when a customer dials one of the designated service telephone numbers, the AIN intercepts the call and analyzes the called telephone number to determine which service(s) is/are associated with the number. Depending upon the telephone number called, the AIN may query the customer if they are calling for a first

25 or second type of service. Subsequently, the customer is then queried if they are requesting residential or business service. The call is then routed to the appropriate service center for processing. In one embodiment of the invention, when the services are associated with ADSL

and ISDN services, a New Initiative and Product Center (NIAPC) processes all ADSL residential service requests while regional BSCs process all others types of requests, based upon the location of the customer who initiated the service request.

5 In accordance with another embodiment of the invention, status information regarding the types of requests for each telephone number are collected and sent to a customer. The customer determines how they want calls to be routed. The destinations determined by the customer are built into a database which is used to route the calls to a selected service center.

10 In accordance with another embodiment of the invention, test calls are periodically generated to determine the dependability of the network routing operations associated with the AIN interception service. These test calls are not routed directly to a service center, and are not included in status information sent to the customer

Accordingly, a service provider network may dynamically control the traffic to selected service centers, based upon the type of service requested, and the location of the caller requesting the service.

15

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing summary and the following detailed description should not restrict the scope of the claimed invention. Both provide examples and explanations to enable others to practice the invention. The accompanying drawings, which form part of the description of the invention, show several embodiments of the invention, and together with the description, explain the principles of the invention.

20

In the Figures:

Figure 1 is a block diagram of a telecommunications network, in accordance with methods and systems consistent with the invention;

25

Figure 2 is a flow chart of the steps performed for processing service calls, in accordance with methods and systems consistent with the invention;

Figure 3 is a table showing an exemplary abbreviated monitoring report including

limited service call status information, in accordance with methods and systems consistent with the invention; and

Figure 4 is a table showing an exemplary complete monitoring report including detailed service call status information, in accordance with methods and systems consistent with the invention.

DETAILED DESCRIPTION

The following description of embodiments of this invention refers to the accompanying drawings. Where appropriate, the same reference numbers in different drawings refer to the same or similar elements.

In accordance with an embodiment of the invention, an Advanced Intelligent Network (AIN) service is configured to intercept calls originating from calling parties and directed to particular telephone numbers designated for processing service requests. Depending upon the trigger number, the AIN may instruct a Service Switching Point (SSP) to play an announcement asking a calling party to designate the service requested. If no response is received, or an invalid response is returned, the response is labeled as an invalid entry and is associated with a default service request for processing. Following a calling party's response (or invalid response), a second announcement is played asking the calling party to designate additional information associated with the type of service designated with the first response. Again, if no response is received, or an invalid response is returned, the response is labeled as an invalid entry and is associated with a default service request for processing. Depending upon the calling party's responses and calling party's location, the AIN may route the call to selected service centers, in order to control the traffic to overloaded service centers.

Figure 1 shows a block diagram of a telecommunications network that processes calls for services provided by the network, in accordance with systems and methods consistent with the invention. For illustration purposes, the services governed by a provider of the network will be

described as Asynchronous Digital Subscriber Line (ADSL) and Integrated Services Digital Network (ISDN) services, however it should be noted that the present invention can be applied to a variety of services, and are not limited to the exemplary services described herein.

As shown, Figure 1 comprises a wireline device 105, Public Switch Telephone Network (PSTN) 110, Business Service Centers (BSCs) 115, Service Switching Point (SSP) 120, Service Transfer Point (STP) 125, New Initiative And Product Center (NIAPC) 130, Service Control Point (SCP) 135 and test call generator 140.

SSP 120 may include, for example, a 5ESSTM, DMS-100TM (or DMS-200TM), GTD-5TM. As explained below in detail, SSP 120 is configured to receive and route call requests from PSTN 110 originating from wireline device 105.

Service control point 135 may include, for example, a AI-NETTM, Integrated Service Control Point (ISCPTM), or Service BuilderTM equipment/software manufactured or provided by Lucent Technologies, Inc., Telcordia Technologies, Inc., and Nortel Networks Corporation, respectively. SCP 135 instructs SSP 120 on what announcements to play, and where to route calls.

BSCs 115 are service centers each respectively located in particular regions, and process calls from all business customers and calls for ISDN service. Although only six BSCs are shown in Figure 1, it is understood that a plurality of BSCs exceeding six may be utilized in the network.

NIAPC 130 is a service center that processes calls for residential ADSL service.

Test call generator 140 is an automated testing tool that generates test calls to verify SCP135's ability to invoke a service logic program in response to service calls being received at SSP 120.

Figure 2 is a flow chart of the steps performed by the network illustrated in Figure 1, when processing service requests for ADSL and ISDN services. Processing begins when a service customer, or calling party, calls one of two telephone numbers designated for ordering a particular service such as ISDN or ADSL. The call is received through PSTN 110, and

automatically directed to a designated switching point dedicated to handling these types of service requests. Once the trigger number is encountered, SSP 120 launches a query message to SCP 135 (Step 200). The query message contains the CallingPartyId or ChargeNumber, and is routed to SCP 135 through STP 125. Once received, a Service Logic Program (SLP) is executed
5 by SCP 135 that analyzes the query message and trigger numbers to determine what type of announcement is to be played.

Before call screening operations commence, SCP 135 determines whether the incoming call is from test call generator node 140 (Step 205). Test call generator 140 is an automated testing tool that injects test calls into the network, and monitors whether the test call is routed
10 properly from the calling party to SCP 135. Test call generator ensures the test calls that include trigger numbers identical to those associated with the services provided by the network, are received at SSP 120, and eventually invoke the SLP on SCP 135. If a test call was encountered, its receipt is confirmed with test call generator 140 (Step 207), and subsequently the call is terminated.

15 In the event the incoming call was not a test call, SCP 135 analyzes the trigger number to determine what type of query processing is needed for the customer. This analysis is performed in order to reduce possible processing operations performed by the SLP, thus reducing the load on the network. In one embodiment of the invention, each type of service offered is advertised in different forums. For example, the telephone number associated with ADSL service may be
20 provided only to Internet Service Providers (ISPs) for advertising. ISDN services are advertised in any remaining forums, excluding the ISP forum. Other forums associated with a default product, such as ADSL service, may be implemented as well. Accordingly, when the SLP analyzes the trigger number and query message, it checks to determine whether the trigger number is associated with the number only advertised by the ISPs (Step 210). Calls made to the
25 telephone number advertised by the ISPs are already known to be ADSL inquires. Rather than confuse potential customers with an ISDN option, these calls are processed by forwarding SLP operations to query the calling party for types of ADSL service desired (Step 220), as will be

described later.

The SLP supports Numbering Plan Area (NPA) splits of the trigger number. Although it is not the responsibility of the SLP to convert and store any calling party data from an old NPA to a new NPA, both of the old and new numbers are accepted by the SLP and processed in the same manner. SCP 135 maintains an NPA split table that enables all NPA splits occurring in the North American Number Plan area to be tracked. The table is periodically updated to ensure that calls originating from these split areas are capable of being handled by the SLP.

Returning back to step 210, if the SLP determines that the trigger number is not associated with ISP advertising, the SLP sends instructions to SSP 120 to play an announcement requesting the calling party to choose the service desired, ISDN or ADSL (Step 215). There may be instances where calling parties intending to order ADSL service, utilizes the ISDN dedicated telephone number. To ensure this situation may be handled by the call screening operations of the present invention, the SLP provides the option of ADSL service in the announcement. In one embodiment of the invention, the announcement queries the calling party to select a specific digit on wireline device 105 to indicate the service desired. For example, the announcement may be, but is not limited to:

“If you are calling for DSL service, press one. If you are calling for ISDN service, press two”.

In the event the calling party chooses an invalid entry, or fails to respond, the SLP labels the response as an unknown response and forwards processing to step 220.

At step 220, SCP 135 sends instructions to SSP 120 to play an announcement that queries the calling party for a choice of business or residential service, and collects the response to the query. In one embodiment of the invention, the announcement queries the calling party to select a specific digit on wireline device 105, to indicate the type of service desired. For example, the announcement may be, but is not limited to:

“If this service is for your home, press one. If this service is for your business, press two”.

5 In the event the calling party chooses an invalid entry, or fails to respond, the SLP labels the response as an unknown response.

10 The present invention enables customers, whom are entities that own the call centers and utilize the call center screening service provided by the network, to designate the routing parameters for service request calls. These customers may include a Call Center Management (CCM) (not shown), and selectively choose how the calls are to be routed. The customer specified routing destinations are collected by the network, and stored in a database. Table 1 illustrates exemplary routing options available to these customers. Depending upon the response from the calling party (Step 225), and the routing destinations set up by a customer, the SLP will direct the call to a particular designated service center.

15 As shown in Table 1, ADSL business requests are routed to be processed by an appropriate BSC 115. When SLP determines that a business DSL service request is received (Step 230), the SLP determines how to route the service request call based upon the location of the calling party (Step 240). The Calling Party Number (CPN) or Charge Number (CN) associated with the calling party initiating the service request is compared to a table that contains a national listing of Numbering Plan Areas (NPAs) to locate the originating state. That is, the SLP determines from what state the calling party initiated the call. If no match is found, a default value is used, which may be associated with the NIAPC. The SLP uses the results from the comparison to locate a regional BSC that has been previously designated to handle calls originating from a particular state and the call is routed to the appropriate BSC 115, as shown in step 245.

25 The routing of the calls to the correct BSC 115 is controlled in part by the SLP. The SLP sends routing instructions to SSP 125 using telephone numbers with a predetermined code value as the carrier. In one embodiment of the invention, the telephone number will be a ten digit

number with a four digit carrier code. It should be noted that a plurality of variations may be used for routing the call to a particular BSC, including varying the number of digits used as the routing numbers.

5 BSCs 115 may be assigned regionally depending upon the capabilities of the network providing the services. In one example, each state is assigned a destination telephone number, and BSCs associated with the state and the destination telephone number receive calls originating from that state.

10 When SLP determines that a residential or unknown ADSL service request has been received (Step 230), the call is routed to a single designated service center (Step 235). In the exemplary routing parameters illustrated in Table 1, all residential and unknown ADSL service requests are processed by a designated NIAPC, thus reducing the workload on the BSCs 115. Accordingly, in step 235, the SLP returns instructions to SSP 120 on how to route the call, and SSP 120 performs the routing operations necessary to send the call to a gate at NIAPC 130. NIAPC 130 receives the call and processes the service request. It is apparent that some calling
15 parties that eventually get routed to NIAPC 130 may actually wish to order ISDN or ADSL business services. At this stage, NIAPC 130 will have the capability for routing the call to an appropriate BSC 115, by sending the appropriate routing information to SSP 120, or for processing the service request at the NIAPC 130. The routing operations depend upon a plurality of factors such as, for example, the traffic load at NIAPC 130. Calls that are routed to NIAPC
20 130 are terminated over a provisioned route index and sent with a Dialed Number Identification Service (DNIS) code. A percentage of calls may also be sent to a provisioned telephone number instead of the trunk group.

When SLP determines that an ISDN service request has been received (Step 225), it performs further analysis to determine the type of ISDN service requested by the calling party
25 (Step 250). The exemplary routing parameters shown in Figure 1 indicate that all types of ISDN service are to be handled by an appropriate BSC (Step 260). As performed for business DSL services, the SLP determines how to route the ISDN service request call based upon the location

of the calling party (Step 260). The Calling Party Number (CPN) or Charge Number (CN) associated with the calling party initiating the service request is compared to a table that contains a national listing of Numbering Plan Areas (NPAs) to locate the originating state. That is, the SLP determines from what state the calling party initiated the call. If no match is found, a default value is used, which may be associated with the NIAPC. The SLP uses the results from the comparison to locate a regional BSC that has been previously designated to handle calls originating from a particular state and the call is routed to the appropriate BSC 115, as shown in step 265.

As indicated previously, customers may adjust the routing parameters as they see fit.

That is, a customer may decide to route certain types of ISDN service requests to NIAPC 130. In this case, SLP would return instructions to SSP 120 on how to route the call, and SSP 120 performs the routing operations necessary to send the call to a gate at NIAPC 130, (Step 255). NIAPC 130 receives the call and processes the service request, as described with reference to step 235.

When SLP determines that the service request is unknown (Step 225), the SLP determines whether residential, business or an invalid response was received (Step 270). The SLP determines where to route the call based on the routing parameters set up by the customer, and the result from step 270. The exemplary routing parameters shown in Table 1 show that unknown residential and complete unknown service requests are defaulted to NIAPC 130 (Step 275). Thus, when such service calls are received at SSP 130, and forwarded to SCP 135, the SLP routes calls to NIAPC 130 as previously described with reference to steps 235 and 255. Unknown business calls are routed to an appropriate BSC (Steps 280, 285) based on the caller's location, as previously described with reference to steps 240, 245.

As with any of the services, customers may designate selected service centers to handle selected types of unknown service calls. For example, a customer, such as a CCM node may want all unknown service calls to be handled by NIAPC 130. In this case, the database reflecting the routing parameters shown in Table 1, would be changed to indicate the designated

destinations.

Table 1. Call Routing by Caller Selections

5	Caller Selections	Route by NIAPC	Route by caller's state
	Product	Usage	
	ADSL	Residential	X
	ADSL	Business	X
	ADSL	Unknown	X
10	ISDN	Residential	X
	ISDN	Business	X
	ISDN	Unknown	X
	Unknown	Residential	X
	Unknown	Business	X
15	Unknown	Unknown	X

As can be seen, depending upon the selection of the caller, specific service centers will be selected as the destination for call routing operations. In addition, each target telephone number associated with the routing options listed above may have a designated secondary routing number, or route index with Dialed Number Identification Service (DNIS) code. Calls may be sent to the primary or secondary number based on percentage distribution routing or transmission problems that may occur during operations. For instance, a BSC in a particular state may have a history of experiencing a large amount of traffic in relation to other service centers. Accordingly, calls designated for routing the overloaded BSC may be rerouted to a predetermined auxiliary service center. Furthermore, the auxiliary service center may be selected dynamically, based

upon the current workload of a BSC, or the NIAPC 130 as well. This process institutes versatility in routing service calls to an appropriate service center based on factors that affect performance of the network, including errors and/or faults.

5 In the event an error occurs during AIN processing, the call will be returned to SSP 120 for routing as dialed. In one embodiment of the invention, SSP 120 ensures that calls that cannot be processed are delivered to a designated default location, such as NIAPC 130. It should be noted that a variety of service centers may be selected as backups for error processing, including multiple combinations of service centers, based upon the service relationship between SSP 120 and the service centers, as well as the type of failure encountered. For example, in the event of 10 an AIN failure, SSP 120 would only be able to route calls to the service center it is serving. That is, if NIAPC 130 is served by SSP 120, while BSC s 115 were not, SSP 120 would only be able to route a call to NIAPC 130 because it would not have the capability to route the call beyond its locally served center.

15 In order to designate the proper auxiliary service centers, as well as monitor the progress of the AIN call center screening operations, status information is collected for each call that is processed. Traffic information is collected by monitoring predetermined operations associated with the call center screening process. For example, for each triggering number, a number of values are recorded by SCP 135, and stored in a database (not shown). The database may be used to send messages, such as electronic mail, to the customer for future analysis.

20 Figures 3 and 4 illustrate reports that are generated by the AIN processing network and distributed to the service centers and the CCM, for evaluation of traffic and service center screening operations. Figure 3 shows an abbreviated monitoring report that includes a number of values measured during a preselected period of time. The time period for monitoring is flexible, and may be adjusted dynamically. For example, the values may be collected daily, weekly or 25 monthly. Figure 4 shows a more detailed report that includes additional values collected that are not included in the abbreviated report illustrated in Figure 3. The customer analyzes the aggregated status information found in the reports. The information collected in the reports may

be utilized to adjust the designations of primary or auxiliary service centers, as well as provide an indication of how well the call screening process is performing, so changes in hardware or call processing software may be implemented. For example, referring to the routing parameters shown in Table 1, suppose a BSC located in the state of Pennsylvania was overloaded with
5 business ADSL service calls from that state, while NIAPC 130 was receiving low levels of traffic. A customer may recognize the need to perform traffic balancing based on received status reports, and thus decide to change the destination of calls from this state to the NIAPC 130. In this case, the database storing the destinations for the service calls would be changed to reflect the new destination. Referring to Table 1, this would change the routing parameters to reflect
10 that all ADSL service requests are to be sent to NIAPC 130. Subsequently, on the next report, the customer may decide that NIAPC 130 was being overloaded, and another change in routing parameters would be instituted. Accordingly, the present invention allows the call center screening procedures to be performed dynamically and selectively.

As described, systems, methods and articles of manufacture, consistent with the present
15 invention, allow overloaded service centers to be relieved of excess traffic by screening incoming service request calls, and automatically routing the calls to predetermined destination nodes, based on the trigger number of the call.

The foregoing description of an implementation of the invention has been presented for purposes of illustration and description. It is not exhaustive and does not limit the invention to
20 the precise form disclosed. Modifications and variations are possible in light of the above teachings or may be acquired from practicing of the invention. For example, although ADSL and ISDN services were utilized to describe the operations of the present invention, a number of different types of services may be implemented without affecting the AIN call center screening operations described above. That is, the type of service being provided by the network are not
25 limited to the examples described above. Additional modifications and variations of the invention may be, for example, the described implementation includes software but the present invention may be implemented as a combination of hardware and software or in hardware alone.

[illegible]

WHAT IS CLAIMED IS:

1. A method for processing requests for a network service, comprising the steps
of:

receiving a call from a calling party, wherein the call includes a trigger number;

determining whether or not the trigger number matches a predetermined trigger number;

5 requesting the calling party to select a first or second service, in response to the
determination that the trigger number does not match the predetermined trigger number;

requesting the calling party to select a type of the first service in response to the
determination that the trigger number matches the predetermined trigger number; and

10 routing the call to one of a plurality of service centers, based upon a response from the
calling party to the request.

2. The method of claim 1, wherein the step of requesting the calling party to select a
first or second service, in response to the determination that the trigger number does not match
the predetermined trigger number, further includes:

requesting the calling party to select a type of the first service in response to the calling
5 party selecting the first service; and

requesting the calling party to select a type of the second service in response to the calling
party selecting the second service.

3. The method of claim 2, wherein the routing step further includes:

routing the call to a first service center in response to the calling party selecting a first type of the first service; and

5 routing the call to a second service center in response to the calling party selecting one of a second type of the first service, a first type of the second service and a second type of the second service.

4. The method of claim 3, wherein routing the call to a second service center further includes:

locating the second service center based upon a calling party number associated with the calling party.

5. The method of claim 3, wherein routing the call to a second service center further includes:

locating the second service center based upon a state from which the calling party initiates the call.

6. The method of claim 5, wherein the calling party is associated with a calling party number, and wherein locating the second service center further includes:

comparing the calling party number with a number plan area table to determine the state from which the calling party initiates the call.

7. The method of claim 1, further including:

collecting status information associated with the call; and

storing said status information in a status log.

8. The method of claim 7, wherein the status information includes information associated with the service selected by the calling party, the type of service selected by the calling party, the service center to which the call was routed and abandoned calls.

9. The method of claim 7, further including:

utilizing the collected status information to determine where the service center subsequent calls are to be routed.

10. The method of claim 3, wherein when the first service center is associated with a first auxiliary service center, the method further including the steps of:

detecting a error condition associated with routing the call to the first service center; and

rerouting the call to the first auxiliary service center.

11. The method of claim 10, wherein the first auxiliary service center is the second service center.

12. The method of claim 10, wherein when the second service center is associated with a second auxiliary second service center, the method further including the steps of:

detecting an error condition associated with routing the call to the second service center;

and

5 rerouting the call to the second auxiliary service center.

13. The method of claim 12, wherein the second auxiliary service center is the first service center.

14. The method of claim 1, wherein the first service is ADSL service and the second service is ISDN service.

15. The method of claim 14, wherein the type of the first service is one of residential or business ADSL service.

16. The method of claim 2, wherein the first service is ADSL service and the second service is ISDN service and wherein the type of the first service is one of residential and business ADSL service, and the type of the second service is one of residential and business ISDN service.

17. A system for processing requests for network services, comprising:

a calling party node connected to a network;

a switching node connected to the network for receiving a service request call including a trigger number, from the calling party node through the network;

5 a switching control node connected to the switching node for determining a service center to which the call is to be routed, based on the trigger number and service query responses from the calling party;

a first service center connected to the switching node for processing call requests for a first service; and

0 a plurality of second service centers connected to the network for processing call requests
for a second service.

18. The system of claim 17, wherein the switching control node determines whether or not the trigger number matches a predetermined trigger number, and wherein the service query responses are received in response to the switching node requesting the calling party node to select a first or second service in response to the determination that the trigger number does not match a predetermined trigger number.

19. The system of claim 17, wherein the switching control node determines whether or not the trigger number matches a predetermined trigger number and wherein the query responses are received in response to the switching node requesting the calling party node to

select a type of the first service in response to the determination that the trigger number does
5 match a predetermined trigger number.

20. The system of claim 18, wherein the switching control node instructs the switching node to request the calling party node to select a type of the first service in response to the calling party node selecting the first service and requests the calling party node to select a type of the second service in response to the calling party node selecting the second service.

21. The system of claim 20, wherein the switching control node instructs the switching node to route the call to the first service center in response to the calling party node selecting a first type of the first service.

22. The system of claim 20, wherein the switching control node instructs the switching node to route the call to one of the plurality of second service centers in response to the calling party node selecting one of a second type of the first service, a first type of the second service and a second type of the second service.

23. The system of claim 22, wherein the switching control node includes a memory device that contains a number plan area table and wherein the switching control node determines the one of the plurality of second service centers by comparing a calling party number associated with the calling party node, with information contained in the number plan area table.

24. The system of claim 23, wherein the switching control node determines a state from which the calling party node is located based upon the comparing of the calling party number with the information contained in the number plan area table.

25. The system of claim 21, further including:
a first auxiliary service center for receiving the call routed to the first service center when the switching control node detects an error in routing the call to the first service center.

26. The system of claim 22, further including:
a second auxiliary service center for receiving the call routed to the one of the plurality of second service centers when the switching control node detects an error in routing the call to the one of the plurality of second service centers.

27. The system of claim 17, further including:
a test call generator connected to the network for generating test calls including a test trigger number directed to the switching node, wherein the test call generator verifies whether the switching control node receives the test call.

28. The system of claim 17, wherein the switching control node includes a service logic program, the system further comprising:

a test call generator connected to the network for generating test calls to verify that the

switching control node activates the service logic program in response to the switching node

5 receiving the test calls, wherein the service logic program performs the functions of determining a service center to which the call is to be routed to based on the trigger number and service query responses from the calling party.

29. The system of claim 18, wherein the first service is ADSL service and the second service is ISDN service.

30. The system of claim 20, wherein the type of the first service is one of residential and business ADSL service and wherein the type of the second service is one of residential and business ISDN service.

31. A computer-readable medium containing a program for causing a processor to perform a method for processing requests for a network service, the method comprising the steps of:

receiving a call from a calling party, wherein the call includes a trigger number;

5 determining whether or not the trigger number matches a predetermined trigger number;

requesting the calling party to select a first or second service, in response to the determination that the trigger number does not match the predetermined trigger number;

requesting the calling party to select a type of the first service in response to the determination that the trigger number matches the predetermined trigger number; and

10 routing the call to one of a plurality of service centers, based upon a response from the calling party to the request.

32. The computer-readable medium of claim 31, wherein the step of requesting the calling party to select a first or second service, in response to the determination that the trigger number does not match the predetermined number, further includes:

requesting the calling party to select a type of the first service in response to the calling
5 party selecting the first service; and

requesting the calling party to select a type of the second service in response to the calling party selecting the second service.

33. The computer-readable medium of claim 32, wherein the routing step further includes:

routing the call to a first service center in response to the calling party selecting a first type of the first service; and

5 routing the call to a second service center in response to the calling party selecting one of a second type of the first service, a first type of the second service and a second type of the second service.

34. The computer-readable medium of claim 33, wherein routing the call to a second service center further includes:

locating the second service center based upon a calling party number associated with the calling party.

35. The computer-readable medium of claim 33, wherein routing the call to a second service center further includes:

locating the second service center based upon a state from which the calling party initiates the call.

36. The computer-readable medium of claim 35, wherein the calling party is associated with a calling party number, and wherein locating the second service center further includes:

5 comparing the calling party number with a number plan area table to determine the state from which the calling party initiates the call.

37. The computer-readable medium of claim 31, wherein the method further includes the steps of:

collecting status information associated with the call; and
storing said status information in a status log.

38. The computer-readable medium of claim 37, wherein the status information includes information associated with the service selected by the calling party, the type of service

selected by the calling party, the service center to which the call was routed and abandoned calls.

39. The computer-readable medium of claim 37, wherein the method further includes the steps of:

utilizing the collected status information to determine where the service center subsequent calls are to be routed.

40. The computer-readable medium of claim 33, wherein the first service center is associated with a first auxiliary service center, the method further including the steps of:

detecting a error condition associated with routing the call to the first service center; and
rerouting the call to the first auxiliary service center.

41. The computer-readable medium of claim 40, wherein the first auxiliary service center is the second service center.

42. The computer-readable medium of claim 40, wherein the second service center is associated with a second auxiliary second service center, the method further includes the steps of:

detecting an error condition associated with routing the call to the second service center;
and

5 rerouting the call to the second auxiliary service center.

43. The computer-readable medium of claim 42, wherein the second auxiliary service center is the first service center.

44. The computer-readable medium of claim 31, wherein the first service is ADSL service and the second service is ISDN service.

45. The computer-readable medium of claim 44, wherein the type of the first service is one of residential or business ADSL service.

46. The computer-readable medium of claim 32, wherein the first service is ADSL service and the second service is ISDN service and wherein the type of the first service is one of residential and business ADSL service, and the type of the second service is one of residential and business ISDN service.

Methods and systems are provided for call center screening that enable a network service provider to dynamically control service request traffic directed to selected service centers. An Advanced Intelligent Network (AIN) service is configured to intercept calls originating from calling parties and directed to trigger numbers designated for processing predetermined service requests. Depending upon the trigger number, the AIN may play an announcement asking a calling party to designate the service requested. Following a calling party's valid response, a second announcement is played asking the calling party to select the type of service associated with the first response. Depending upon the calling party's responses and calling party's location, the AIN may route the call to selected service centers, in order to control the traffic to overloaded service centers.

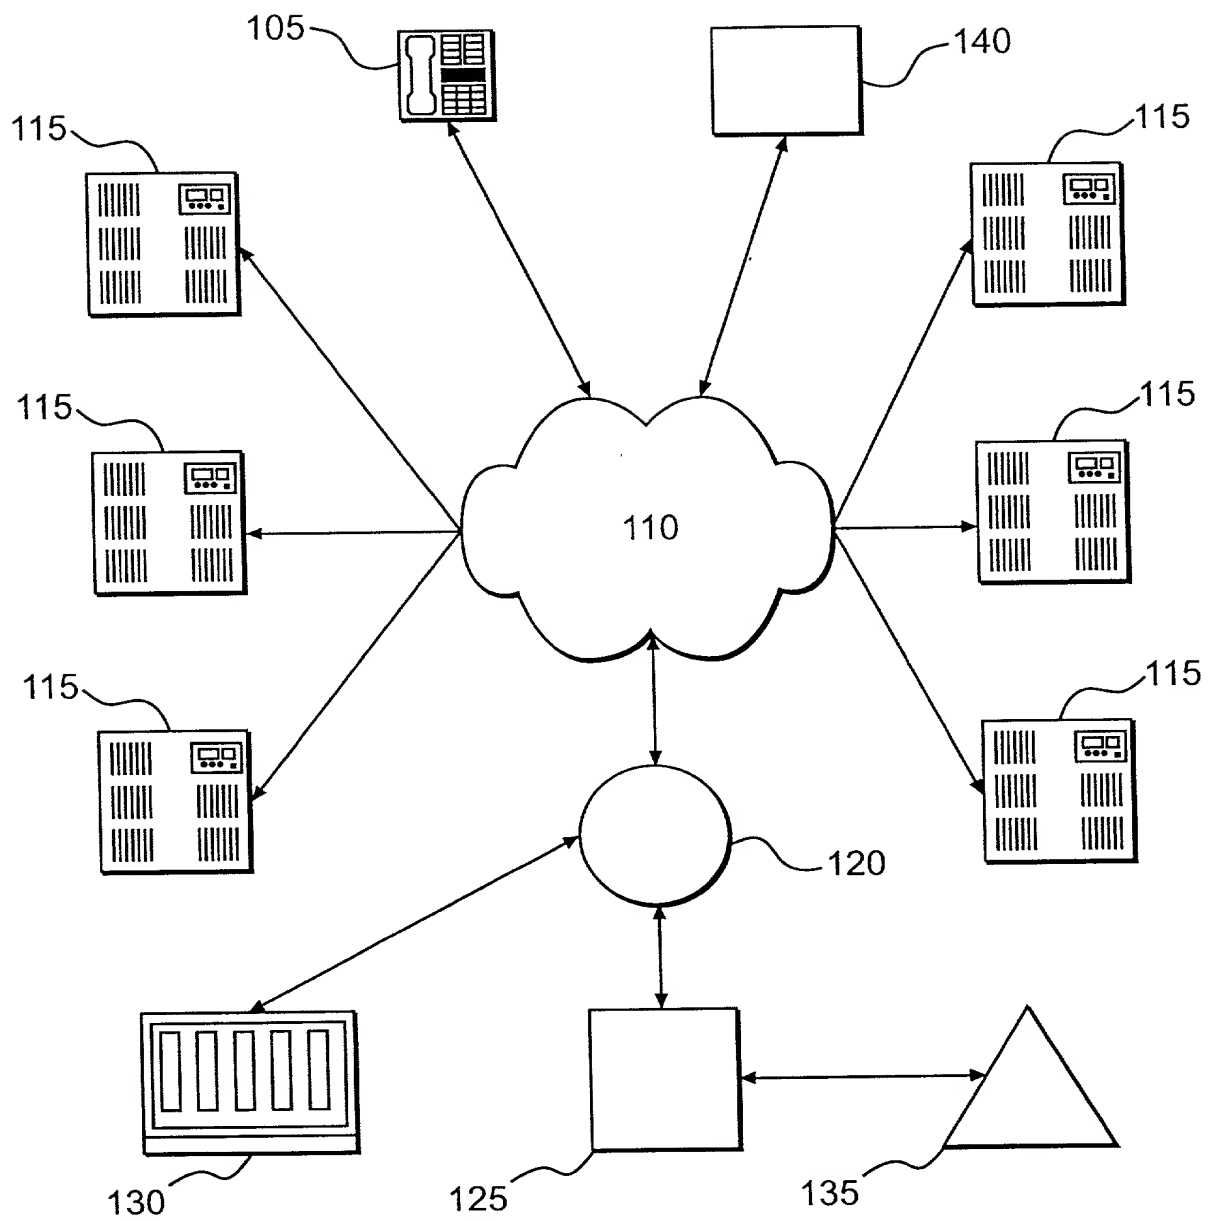


FIG. 1

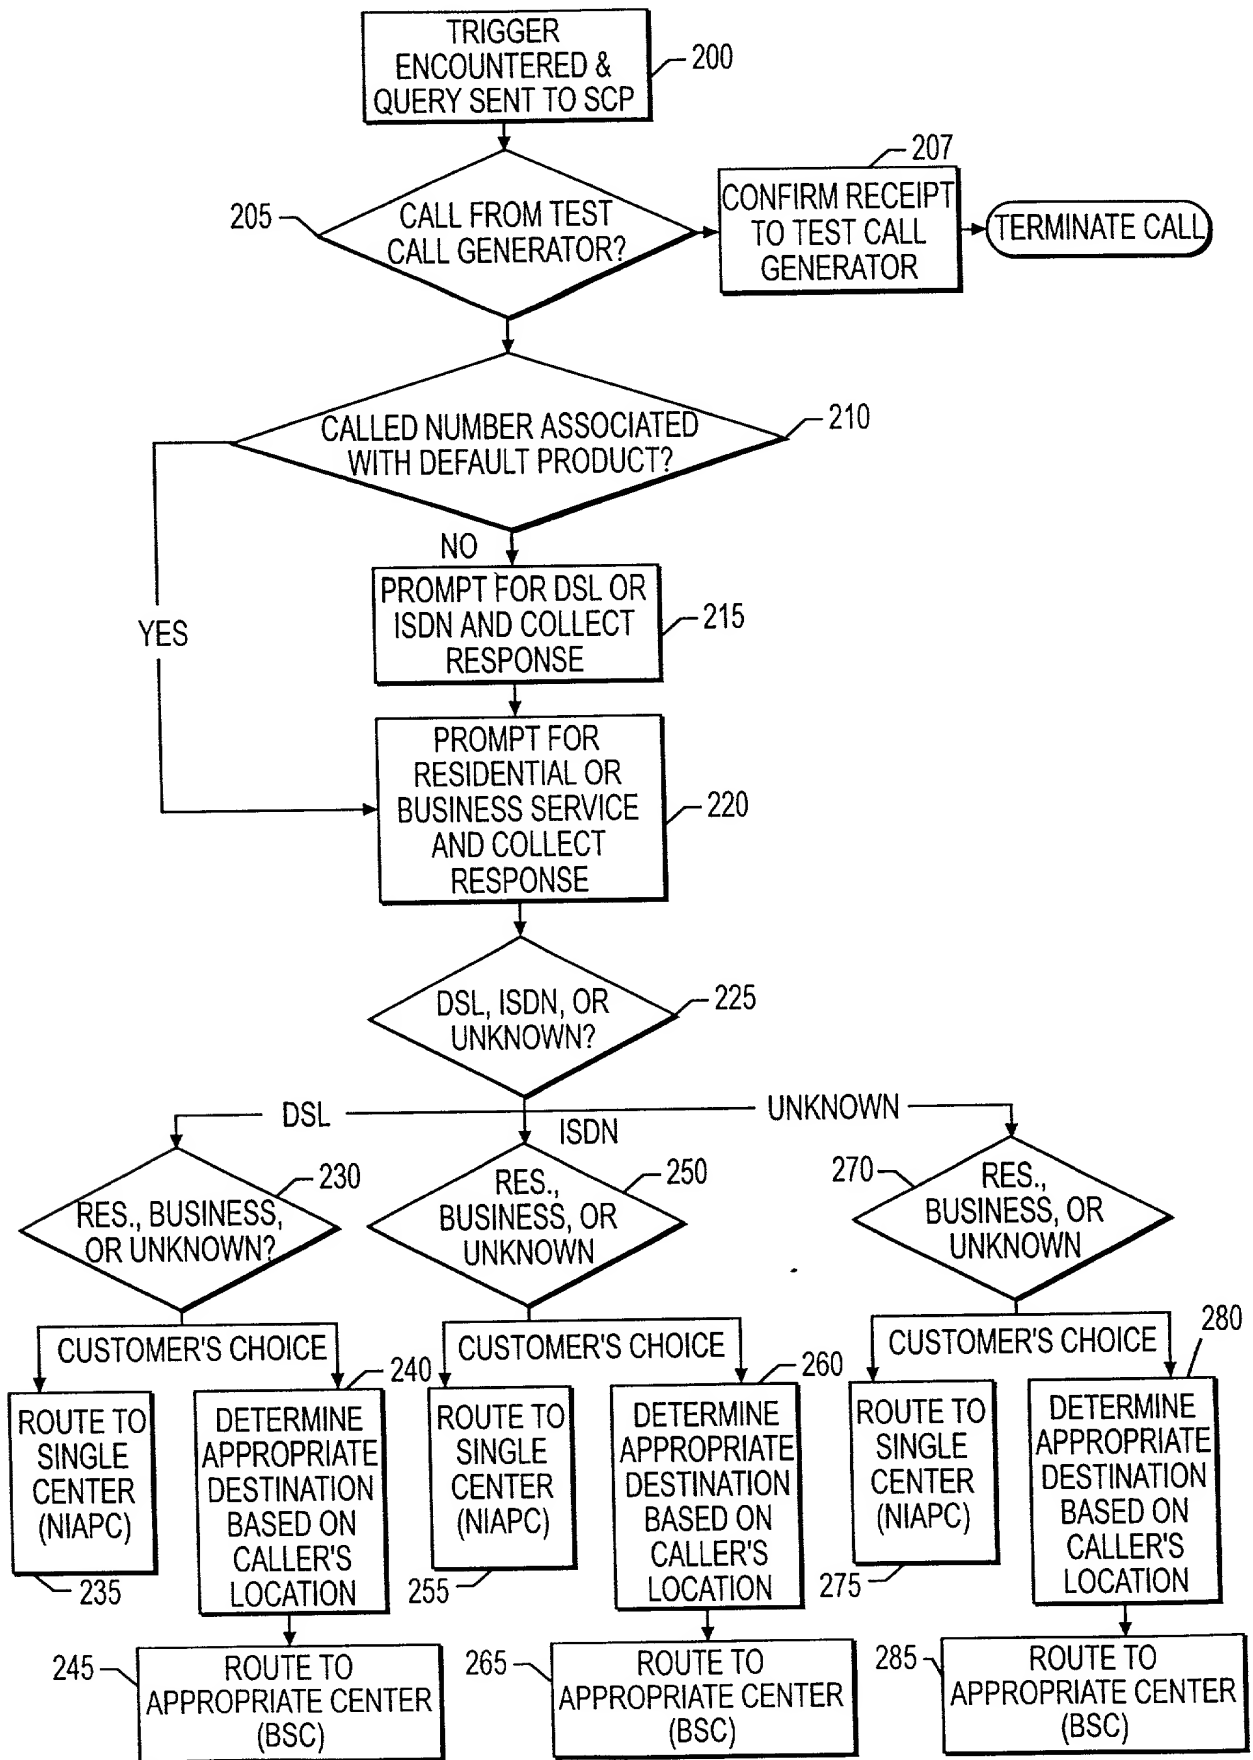


FIG. 2

[illegible]

FIG. 3

FIG. 4

**DECLARATION AND POWER OF ATTORNEY FOR PATENT
APPLICATION**

Attorney Docket No. 00-5019

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

METHOD AND SYSTEM FOR CALL CENTER SCREENING

the specification of which (check one) ☒ is attached hereto. ☐ was filed on
as Appln. Serial No. _____ and was amended on _____
(if applicable). I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			<u>Priority Claimed</u>
_____ (Number)	_____ (Country)	_____ (Day/Month/Year filed)	<input type="checkbox"/> Yes <input type="checkbox"/> No

I hereby claim the benefit under Title 35, United States Code, 119(e) of any United States provisional application(s) listed below.

_____ (Application Number)	_____ (Filing Date)
-------------------------------	------------------------

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date for this application:

_____ (Appln. Serial No.)	_____ (Filing Date)	_____ (Status--patented, pending, abandoned)
------------------------------	------------------------	---

Attorney Docket No. 00-5019

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Leonard C. Suchyta, Reg. No. 25,707, and James Weixel, Reg. No. 44,399

Address all telephone calls to James K. Weixel at telephone no. (781) 466-2220

Address all correspondence to Leonard C. Suchyta
Verizon Services Group
600 Hidden Ridge, HQE03G13
Irving, TX 75038

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF SOLE OR FIRST INVENTOR Douglas J. Cowell

Inventor's signature _____ Date _____

Residence Irving, Texas Citizenship USA

Post Office Address 810 W. Royal Ln., Apt. 133, Irving, TX 75039

FULL NAME OF SECOND INVENTOR Ravi Narayan

Inventor's signature _____ Date _____

Residence Honolulu, Hawaii Citizenship India

Post Office Address 2733 Terrace Dr., Honolulu, HI 96822